INSTRUCCIONES PARA LA INSTALACION

Para modelos con anillos de ajuste
AGUARDE ESTAS INSTRUCCIONES

ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR CENTRAL·

ASSEMBLING THE TRIM RING (Fig.1)

1. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en una superfice despejada.Tenga cuidado de no perder las partes pequeñas que son necesarias para la instalacion.
2. Coloque el anillo de cristal (C) en el anillo decorativo (D), luego cubra con la placa (B) y alinee los agujeros de la placa con los agujeros del anillo decorativo.
3. Pase los tornillos (A) por los agujeros de la placa y apriétela al anillo decorativo.

INSTALLATION (Fig. 2)

4. Desconecte la corriente en el cortacircuitos.
5. Retire la bombilla del receso actual puede y anillo.
6. Antes de instalar el marco de montaje reflector a la vivienda, quite y deseche la placa de zócalo (G) en la vivienda por la aflojando la tuerca de mariposa (H) y el tornillo (E), como muestran en la fig. 2-A.
7. Coloque el marco de montaje reflector en la posición por debajo del techo, inserte los enganches del zócalo (F) en las ranuras (K) situado en la parte superior del marco de montaje deflector. Pellizque las patas del resorte (L) e inserte las patas en la "L" pestañas (I), que sobresale de la parte interior de la vivienda y suelte el resorte, como se muestra en la fig. 2-B. Repita con el otro resorte. Empuje el marco hacia el techo, se ampliarán los resortes asegurando el marco de montaje deflector en su lugar.
8. Instalar o cambiar la bombilla (H) (no incluidas) con el instrumento do succión (N) proporcionar con anillo como se muestra en la fig. 2-C.

PRECAUCIÓN: Consulte la etiqueta de la lámpara situada cerca del portalámparas para el voltaje máximo recomendado de la bombilla.

(NO EXCEDA MAS DE LOS VATIOS ESPECIFICADOS!).

Su instalación se ha completado, vuelva a conectar la corriente.

Nota: La illustracion en la (Fig.1&Fig.2) de este manual es para el proposito de la instalacion solamente. Puede variar con la lampara que usted compro.

Fig. 1

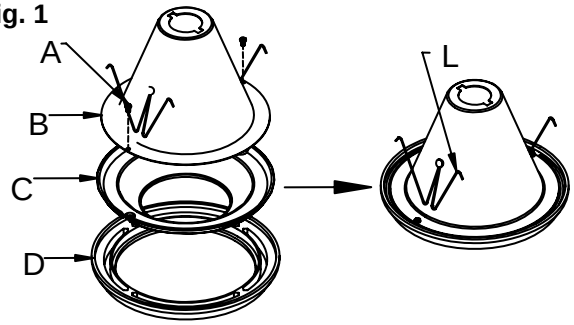

Fig. 2-A

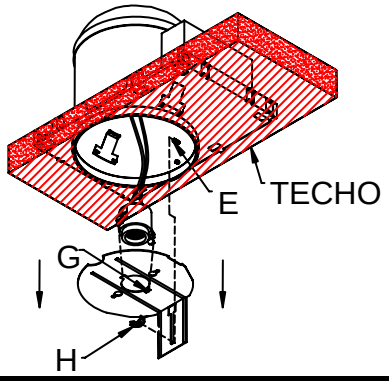

Fig. 2-B

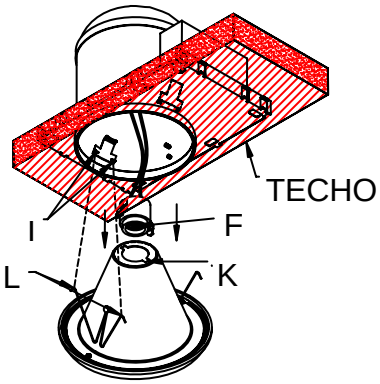

Fig. 2-C

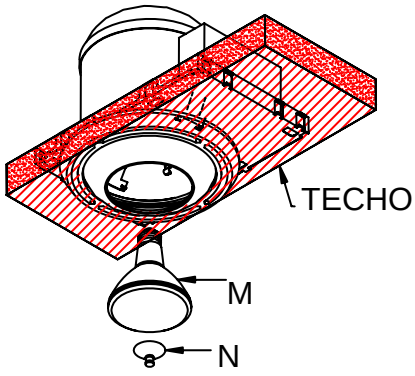

En caso de preguntas sobre la instalacion o le faltaron partes, porfavor hablar al departamento de **Servicio al Cliente** al **1-800-527-0998** de Lunes a Viernes de 8:00 a.m. a 5:00 p.m. PST (Tiempo del Pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-1463E/S

INSTALLATION INSTRUCTIONS

For Trim Rings Models

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

ASSEMBLING THE TRIM RING (Fig.1)

1. Carefully remove the trim ring from the carton and check that all parts are included as shown in the illustration.
2. Place Glass Ring (C) into Trim Ring (D), then cover with Baffle (B) and align the holes in Baffle with the holes in Trim Ring.
3. Thread Screws (A) through the holes in baffle and tighten it to Trim Ring.

INSTALLATION (Fig. 2)

4. Shut off power at the circuit breaker.
5. Remove the bulb from the recess can and current trim ring.
6. Before installing frame baffle assembly to housing, remove and discard the socket plate (G) in housing by loosening Wing Nut (H) and Studs (E) as show in Fig. 2-A.
7. Place the frame baffle assembly in position under the ceiling, insert the clips of Socket (F) into the Slots (K) located on the top of frame baffle assembly. Pinch the legs of the Butterfly Spring (L) and insert the legs into the “L” tabs (I) protruding from the inside of the housing and release the butterfly spring as shown in Fig. 2-B. Repeat with other spring. Push the frame baffle trim up towards the ceiling, the springs will expand and lock the trim in place.
8. Install or replace the Light Bulb (M) (not included) with Suction Cup Tool (N) provide with trim ring as shown in Fig. 2-C.

CAUTION: Refer to the relamping label located near the lamp holder for recommended maximum bulb wattage.
(DO NOT EXCEED RECOMMENDED MAXIMUM WATTAGE !!).

Your installation is now complete turn power back on.

Note: Illustration (Fig.1& Fig.2) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

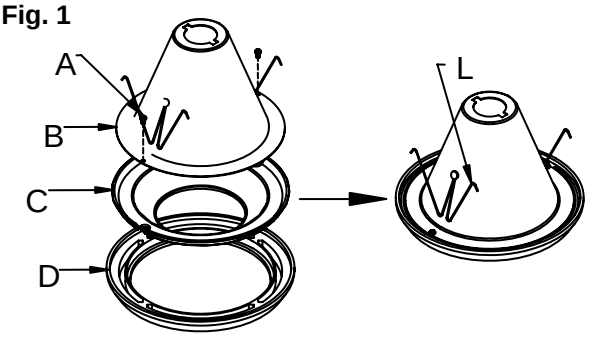

Fig. 2-A

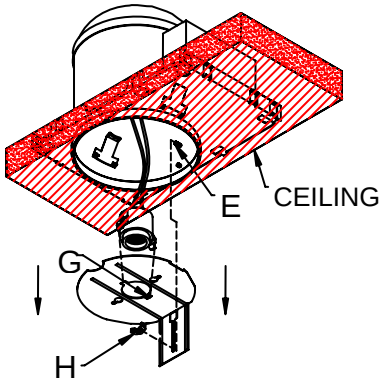

Fig. 2-B

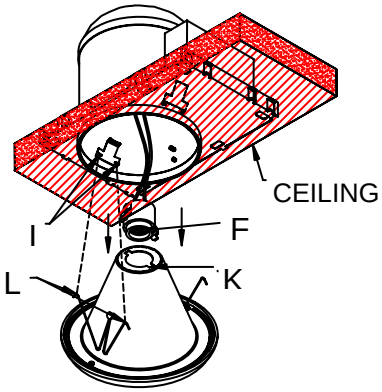

Fig. 2-C

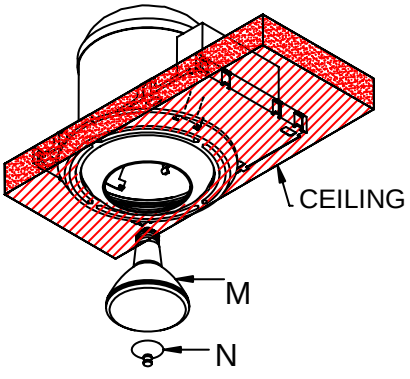

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

LA-1463E/S

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339